

### Discontinuation Notice of Vision Sensor Controller of FZ4-11[ ] series.

#### Product Discontinuation

Vision Sensor Controllers

**Model FZ4-1100**  
**Model FZ4-1100-10**  
**Model FZ4-1105**  
**Model FZ4-1105-10**  
**Model FZ4-1150**  
**Model FZ4-1150-10**  
**Model FZ4-1155**  
**Model FZ4-1155-10**



#### Recommended Replacement

Vision System Sensor Controllers

**Model FZ5-1100**  
**Model FZ5-1100-10**  
**Model FZ5-1105**  
**Model FZ5-1105-10**  
**Model FH-3050**  
**Model FH-3050-10**  
**Model FH-3050**  
**Model FH-3050-10**

#### [ Discontinuation date ]

The end of October, 2015

#### [ Caution on recommended replacement ]

The camera, camera cable, lens and illumination etc. can be used, when FZ4 series are changed to FH series. However please the parallel I/O cable can not be used in FH series. Therefore please prepare it. And please use the DVI-I -RGB Conversion Connector Model FH-VMRGB (For FH Series only), when connecting FH series to RGB analog monitor.

Please confirm the measuring time etc. before changing in advance, because these series have the different CPU.

#### About the use of the remodeling software

It is necessary to verify the operation if the remodeling software are used.

Please inquire of the trading company dealing our products including the version up to the remodeling software.

#### [ Difference from discontinued product ]

Recommended replacement Model	Body Color	Dimensions	Wire connection	Mounting Dimensions	Characteristics	Operation ratings	Operation methods
FZ5-1100	**	**	**	**	**	**	**
FZ5-1100-10	**	**	**	**	**	**	**
FZ5-1105	**	**	**	**	**	**	**
FZ5-1105-10	**	**	**	**	**	**	**
FH-3050	--	--	--	--	--	*	*
FH-3050-10	--	--	--	--	--	*	*

\*\* : Compatible

\* : The change is a little/Almost compatible


-- : Not compatible



- : No corresponding specification

**[ Product Discontinuation and recommended replacement ]**



Product discontinuation	Recommended replacement
FZ4-1100	FZ5-1100
FZ4-1100-10	FZ5-1100-10
FZ4-1105	FZ5-1105
FZ4-1105-10	FZ5-1105-10
FZ4-1150	FH-3050
FZ4-1150-10	FH-3050-10
FZ4-1155	FH-3050
FZ4-1155-10	FH-3050-10

**[ Body color ]**


Product discontinuation Model FZ4-110[] Series	Recommendable replacement Model FZ5-110[] Series
	

Product discontinuation Model FZ4-115[] Series	Recommendable replacement Model FH-3050 Series
	

[ Wire connection ]

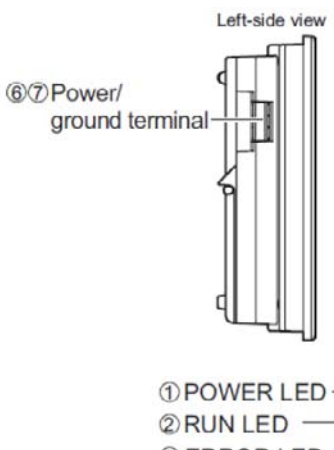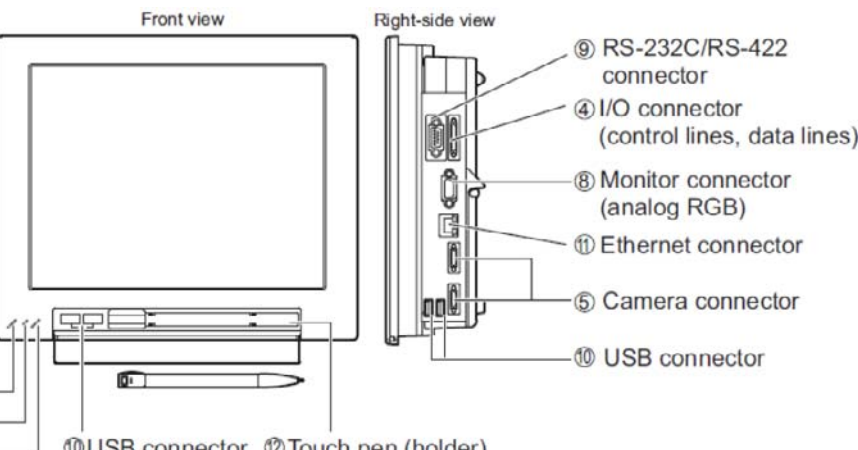Product discontinuation Model FZ4-110[] Series	Recommendable replacement Model FZ5-110[] Series
 <p>⑥⑦ Power/ground terminal</p> <p>① POWER LED ② RUN LED ③ ERROR LED</p>	 <p>④ I/O connector (control lines, data lines)</p> <p>⑧ Monitor connector (analog RGB)</p> <p>⑪ Ethernet connector</p> <p>⑤ Camera connector</p> <p>⑩ USB connector</p> <p>⑨ RS-232C/RS-422 connector</p> <p>⑩ USB connector ⑫ Touch pen (holder)</p>

**Product discontinuation  
Model FZ4-115[] Series**



⑤ Camera connector

⑪ Ethernet connector

⑧ Monitor connector (analog RGB)

⑥⑦ Power/ground terminal

④ I/O connector (control lines, data lines)

① POWER LED


② RUN LED



③ ERROR LED

⑩ USB connector






⑨ RS-232C/RS-422 connector

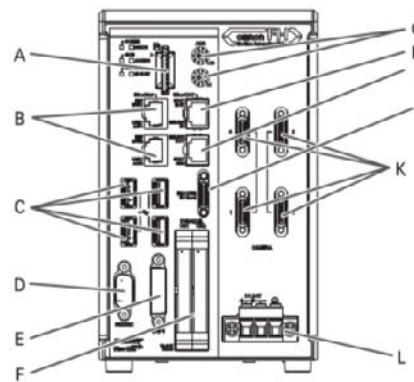**Recommendable replacement  
Model FH-3050 Series**

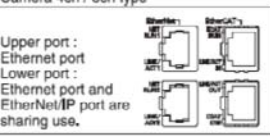

Connector name	Description
A	SD memory card installation connector Install the SD memory card. Do not plug or unplug the SD memory card during measurement operation. Otherwise measurement time may be affected or data may be destroyed.
B	EtherNet connector Connect an EtherNet device. <div style="display: flex; justify-content: space-around; font-size: small;"> <div style="border: 1px solid black; padding: 2px;">                     Camera 2ch type  </div> <div style="border: 1px solid black; padding: 2px;">                     Camera 4ch / 8ch type Upper port : Ethernet port Lower port : Ethernet port and EtherNet/IP port are sharing use.  </div> </div>
C	USB connector Connect a USB device. Do not plug or unplug it during measurement. Measurement time might be affected otherwise.
D	RS-232C connector Connect an external device such as a PLC.
E	DVIH connector Connect a monitor.
F	I/O(Parallel) connector(control lines, data lines) Connect the controller to external devices such as a sync sensor and PLC.
G	EtherCAT address setup volume Used to set a station address ( 00 to 99) as an EtherCAT communication device.
H	EtherCAT communication connector (IN) Connect the opposed EtherCAT device.
I	EtherCAT communication connector (OUT) Connect the opposed EtherCAT device.
J	Encoder connector Connect an encoder.
K	Camera connector Camera connector No. is consistent with Camera Image Input No. of Sensor controller software. Check and connect them.
L	Power supply terminal connector Connect a DC power supply. Wire the FH Sensor Controller independently on other devices. Wire the ground line. Be sure to ground the FH Sensor Controller alone. Perform wiring using the attached terminal block connector as referring to the description of wiring that connector.

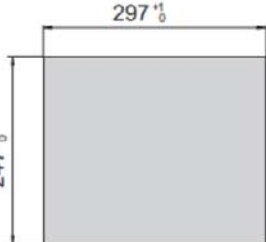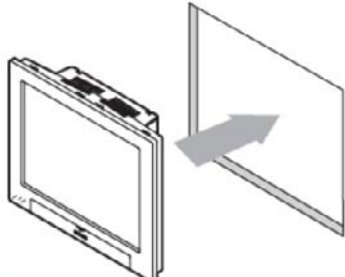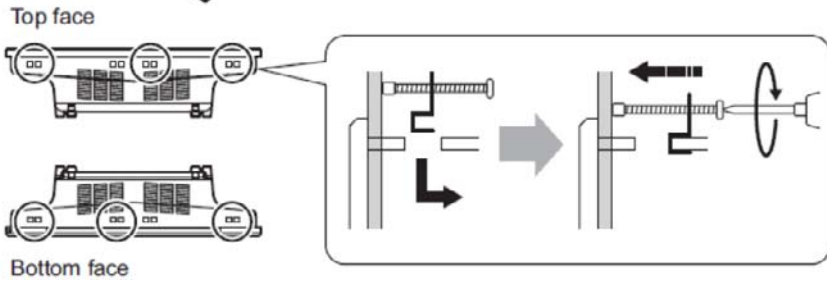
[ Mounting dimensions ]

Product discontinuation Model FZ4-110[] Series	Recommendable replacement Model FZ5-110[] Series
<p>●LCD integrated type</p>	
<p>• Panel mounting</p>	
<p>① Make a mount hole on the panel. Panel thickness range: 1.6 to 4.8 mm Panel material: Metal (iron, aluminum or stainless)</p>	<p>(Unit: mm)</p>  <p>* No burr allowed</p>
<p>② Insert the LCD integrated controller into the hole, from the front panel.</p>	
<p>③ Use the bracket (supplied with the product) to secure the controller and the panel.</p> <p>Tightening torque: 0.5 to 0.6 Nm</p>	 <p>Top face</p> <p>Bottom face</p>
<p>• Mounting the controller to the optional desktop stand.</p> <p>The controller can be placed on a desk by attaching the optional desktop stand (FZ-DS) to the rear of the controller.</p> <p>* For details, refer to the instruction manual of the desktop stand.</p> 	<p>• Mounting the controller to the optional VESA attachment unit.</p> <p>VESA-compatible mounting of the controller is possible by attaching the optional VESA attachment unit (FZ-VESA) to the rear of the controller.</p> <p>* For details, refer to the instruction manual of the VESA attachment unit.</p> 


[ Mounting dimensions ]

**Product discontinuation  
Model FZ4-115[] Series**

- Box type
- Side mounting

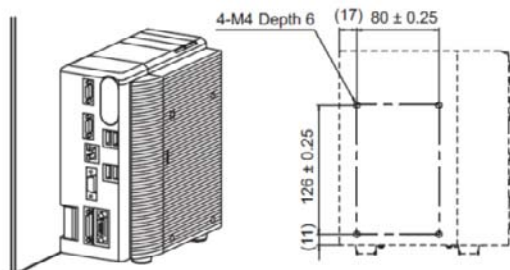


- Bottom mounting

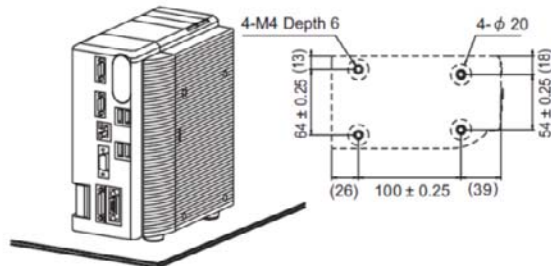


\* When mounting the controller on its bottom, it must be fixed without removing the feet to reserve ventilation path.

**Recommendable replacement  
Model FH-3050 Series**


- Side Mounting



- Left side




- Right side




(Unit: mm)

\* Recommended tightening torque: 1.2N·m to 1.3N·m  
\*The tolerance is ± 0.2mm.

- Bottom Mounting

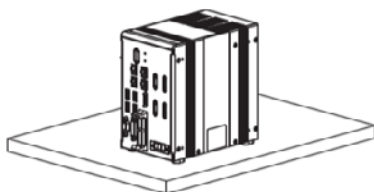


- Bottom

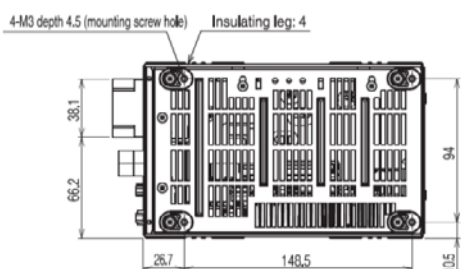


(Unit: mm)

\* Do not remove the Insulating leg. Fix the Insulating leg to secure the ventilation path.  
\* Recommended tightening torque: 0.54N·m to 0.6N·m  
\*The tolerance is ± 0.2mm.

- Camera cable mounting

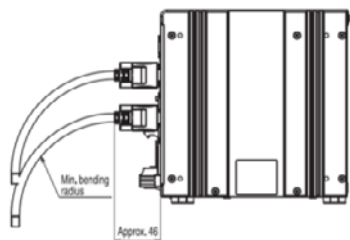


[ Dimensions ]

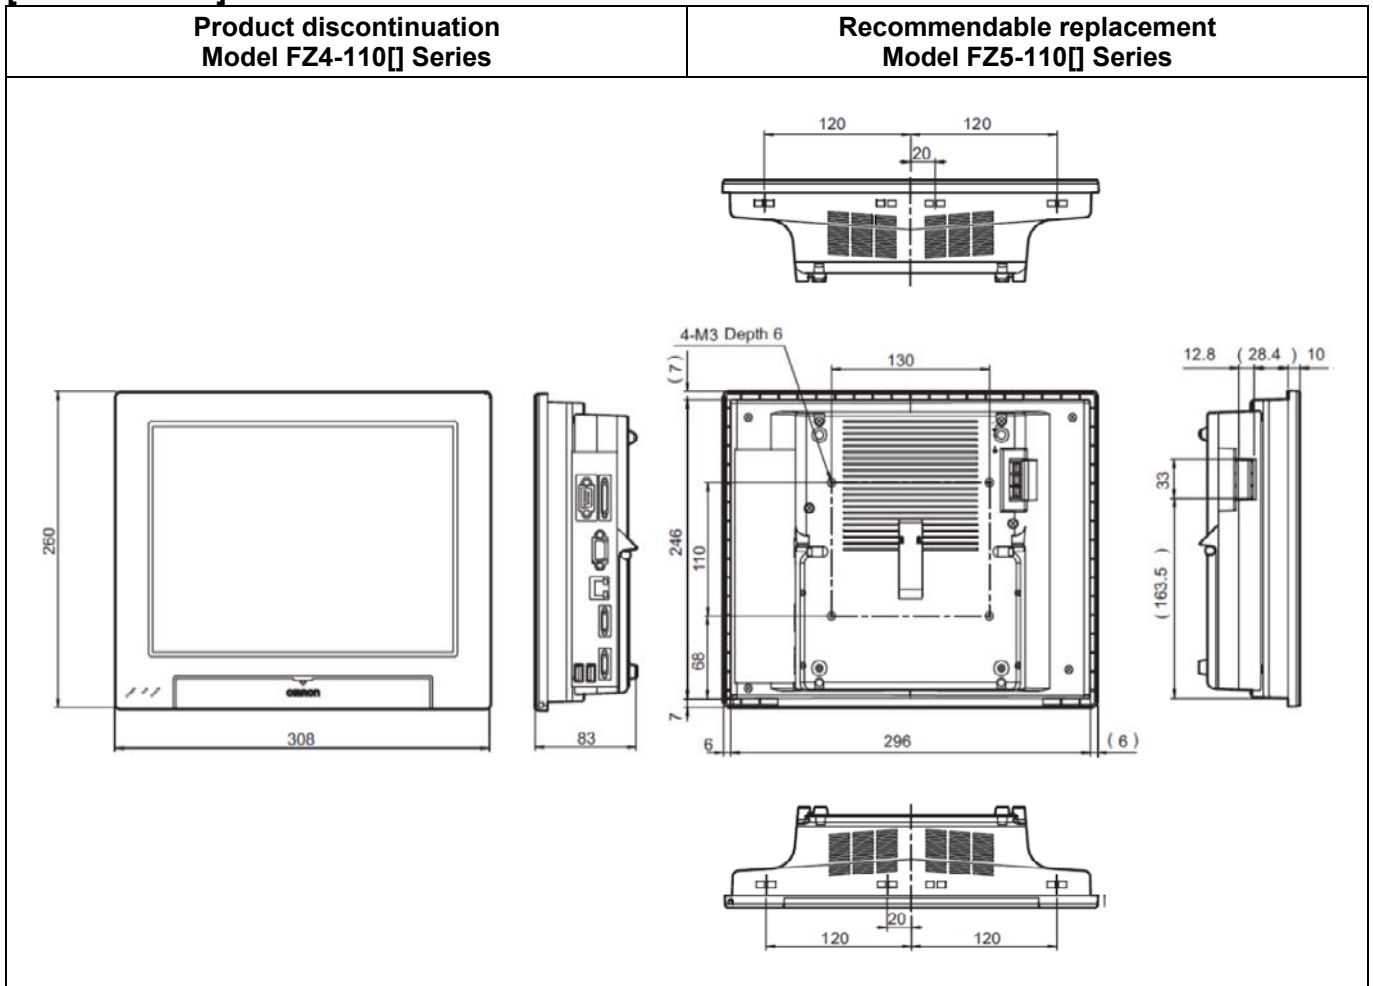


[ Dimensions ]

Product discontinuation  
Model FZ4-115[] Series

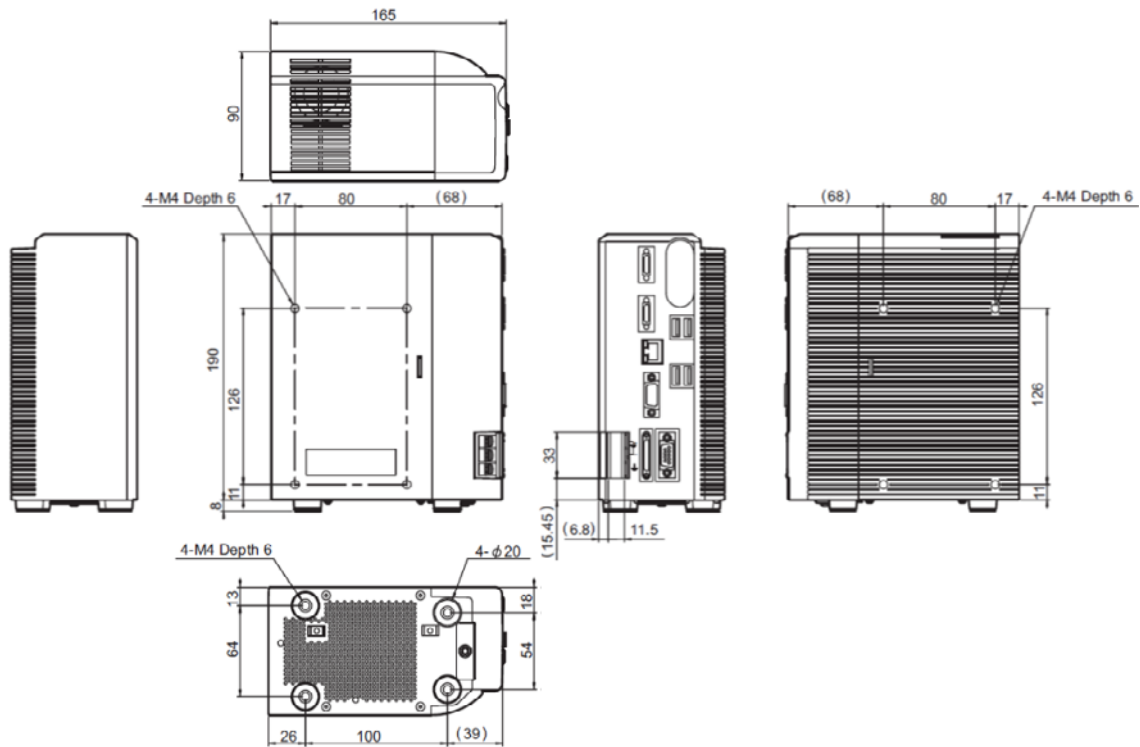


Recommendable replacement  
Model FH-3050 Series

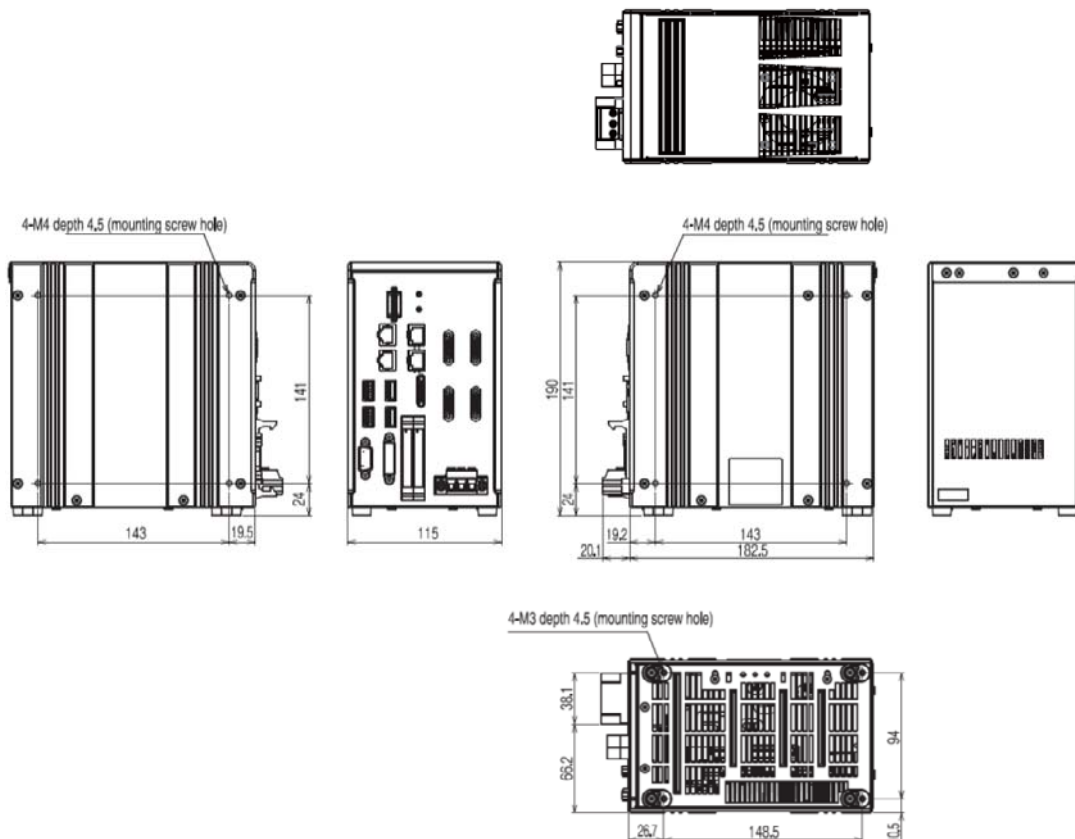




[ System Configuration ]

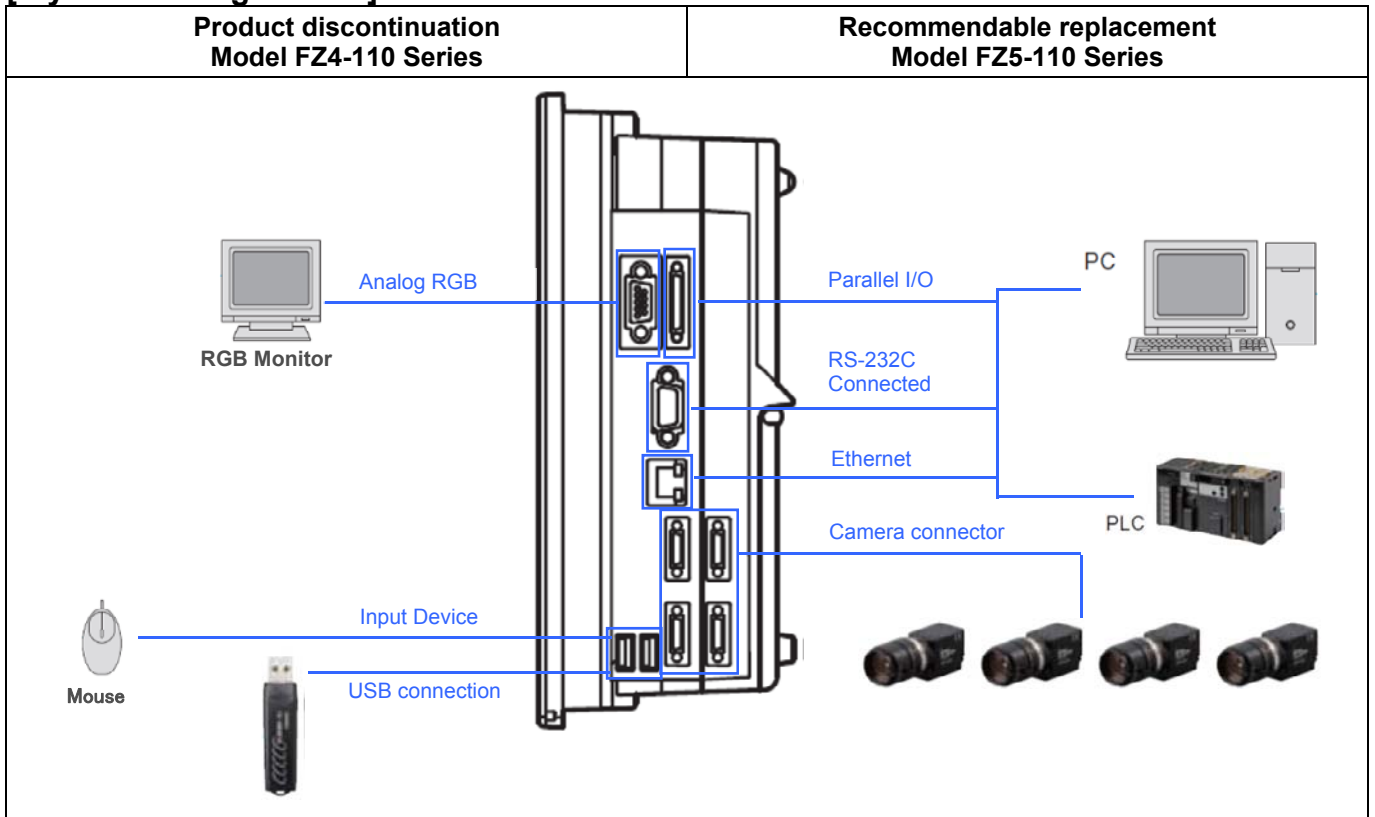




[ System Configuration ]

**Product discontinuation  
Model FZ4-115[] Series**

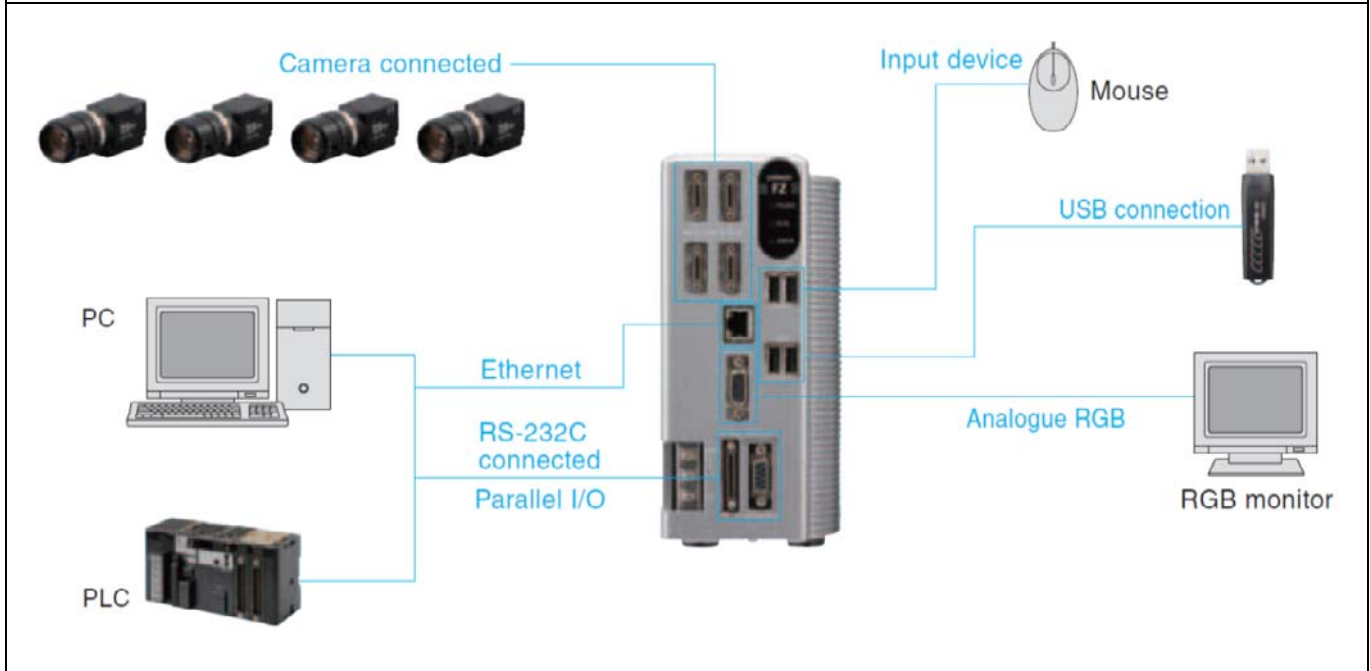

**Recommendable replacement  
Model FH-3050 Series**

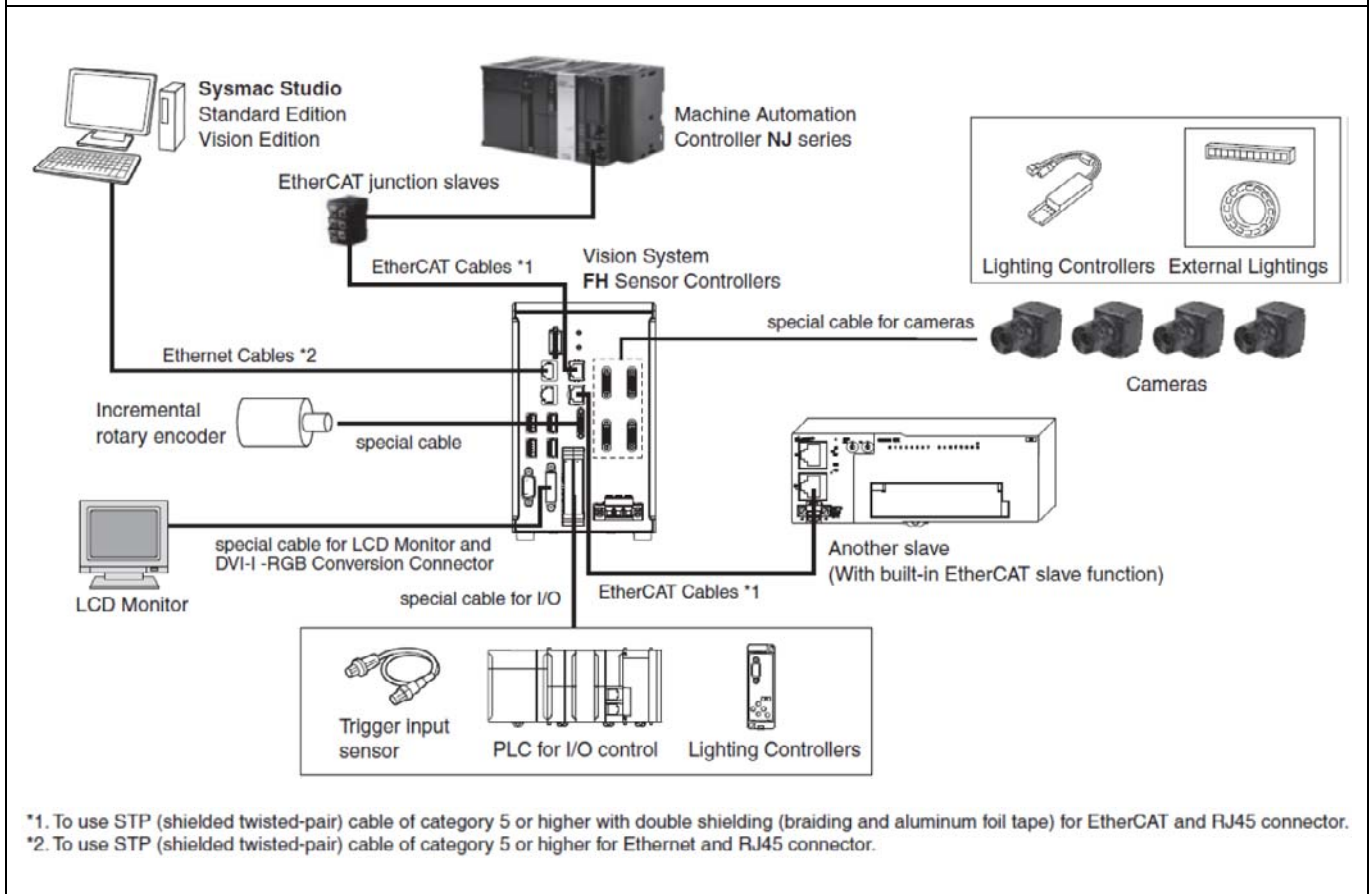

\*1. To use STP (shielded twisted-pair) cable of category 5 or higher with double shielding (braiding and aluminum foil tape) for EtherCAT and RJ45 connector.  
\*2. To use STP (shielded twisted-pair) cable of category 5 or higher for Ethernet and RJ45 connector.

[ Specifications ]

Item		Product discontinuation Model FZ4-110[] Series		Recommendable replacement Model FZ5-110[] Series	
Model	NPN	FZ4-1100	FZ4-1100-10	FZ5-1100	FZ5-1100-10
	PNP	FZ4-1105	FZ4-1105-10	FZ5-1105	FZ5-1105-10
Controllers type		LCD Integrated type			
No. of cameras		2 camera type	4 camera type	2 camera type	4 camera type
Connected camera		FZ-S series (When connecting 5 million-pixel cameras, up to two cameras can be connected.)			
No. of scenes		32		128	
Operation		Mouse etc.			
Settings		Create series of processing steps by editing the flowchart (Help messages provided).			

Item		Product discontinuation Model FZ4-115[] Series		Recommendable replacement Model FH-3050 Series	
Model	NPN	FZ4-1150	FZ4-1150-10	FH-3050	FH-3050-10
	PNP	FZ4-1155	FZ4-1155-10	FH-3050	FH-3050-10
Controllers type		BOX type			
No. of cameras		2 camera type	4 camera type	2 camera type	4 camera type
Connected camera		FZ-S series (When connecting 5 million-pixel cameras, up to two cameras can be connected.)		FZ-S/FH-S series	
No. of scenes		32		128	
Operation		Mouse etc.			
Settings		Create series of processing steps by editing the flowchart (Help messages provided).			

[ Processing resolution ]

Item	Product discontinuation Model FZ4-110[] Series	Recommendable replacement Model FZ5-110[] Series
When connected to an intelligent compact camera	752 (H) × 480 (V)	
When connected to a 300,000-pixel camera	640 (H) × 480 (V)	
When connected to a 2 million-pixel camera	1,600 (H) × 1,200 (V)	
When connected to a 5 million-pixel camera	2,448 (H) × 2,044 (V)	

Item	Product discontinuation Model FZ4-115[] Series	Recommendable replacement Model FH-3050 Series
When connected to an intelligent compact camera	752 (H) × 480 (V)	FZ-S: 752 (H) × 480 (V)
When connected to a 300,000-pixel camera	640 (H) × 480 (V)	FZ-S: 640 (H) × 480 (V) FH-S: 640 (H) × 480 (V)
When connected to a 2 million-pixel camera	1,600 (H) × 1,200 (V)	FZ-S: 1,600 (H) × 1,200 (V) FH-S: 2,040 (H) × 1,088 (V)
When connected to a 4 million-pixel camera	-	FH-S: 2,040 (H) × 2,048 (V)
When connected to a 5 million-pixel camera	2,448 (H) × 2,044 (V)	FZ-S: 2,448 (H) × 2,044 (V)
When connected to a 12 million-pixel camera	-	FH-S: 4,084 (H) × 3,072(V)

[ Number of logged images \*1 ]

Item		Product discontinuation Model FZ4-110 Series	Recommendable replacement Model FZ5-110 Series		
When connected to an intelligent compact camera	Connected to 1 camera	232	232		
	Connected to 2 cameras	116	116		
	Connected to 3 cameras	77	77		
	Connected to 4 cameras	58	58		
When connected to a 300,000-pixel camera	Connected to 1 camera	Color	270	270	
		Monochrome	272	272	
	Connected to 2 cameras	Color	135	135	
		Monochrome	136	136	
	Connected to 3 cameras	Color	90	90	
		Monochrome	90	90	
	Connected to 4 cameras	Color	67	67	
		Monochrome	68	68	
When connected to a 2 million-pixel camera	Connected to 1 camera	Color	43	43	
		Monochrome	43	43	
	Connected to 2 cameras	Color	21	21	
		Monochrome	21	21	
	Connected to 3 cameras	Color	14	14	
		Monochrome	14	14	
	Connected to 4 cameras	Color	10	10	
		Monochrome	10	10	
	When connected to a 5 million-pixel camera	Connected to 1 camera	Color	16	16
			Monochrome	16	16
Connected to 2 cameras		Color	8	8	
		Monochrome	8	8	
Connected to 3 camera		Color	5	5	
		Monochrome	5	5	
Connected to 4 cameras		Color	4	4	
		monochrome	4	4	

\*1. The image logging capacity changes when multiple cameras of different types are connected at the same time.

[ Number of logged images \*1 ]

Item		Product discontinuation Model FZ4-115[] Series	Recommendable replacement Model FH-3050 Series	
When connected to an intelligent compact camera (FZ-S)	Connected to 1 camera	232	232	
	Connected to 2 cameras	116	116	
	Connected to 3 cameras	77	77	
	Connected to 4 cameras	58	58	
When connected to a 300,000-pixel camera	Connected to 1 camera	Color	270 (FZ-S)	270 (FZ-S, FH-S)
		Monochrome	272 (FZ-S)	272 (FZ-S, FH-S)
	Connected to 2 cameras	Color	135 (FZ-S)	135 (FZ-S, FH-S)
		Monochrome	136 (FZ-S)	136 (FZ-S, FH-S)
	Connected to 3 cameras	Color	90 (FZ-S)	90 (FZ-S, FH-S)
		Monochrome	90 (FZ-S)	90 (FZ-S, FH-S)
	Connected to 4 cameras	Color	67 (FZ-S)	67 (FZ-S, FH-S)
		Monochrome	68 (FZ-S)	68 (FZ-S, FH-S)
When connected to a 2 million-pixel camera	Connected to 1 camera	Color	43 (FZ-S)	37 (FH-S), 43 (FZ-S)
		Monochrome	43 (FZ-S)	37 (FH-S), 43 (FZ-S)
	Connected to 2 cameras	Color	21 (FZ-S)	18 (FH-S), 21 (FZ-S)
		Monochrome	21 (FZ-S)	18 (FH-S), 21 (FZ-S)
	Connected to 3 cameras	Color	14 (FZ-S)	12 (FH-S), 14 (FZ-S)
		Monochrome	14 (FZ-S)	12 (FH-S), 14 (FZ-S)
	Connected to 4 cameras	Color	10 (FZ-S)	9 (FH-S), 10 (FZ-S)
		Monochrome	10 (FZ-S)	9 (FH-S), 10 (FZ-S)
When connected to a 4 million-pixel Camera (FH-S)	Connected to 1 camera	Color	-	20 (FH-S)
		Monochrome	-	20 (FH-S)
	Connected to 2 cameras	Color	-	10 (FH-S)
		Monochrome	-	10 (FH-S)
	Connected to 3 cameras	Color	-	6 (FH-S)
		Monochrome	-	6 (FH-S)
	Connected to 4 cameras	Color	-	5 (FH-S)
		Monochrome	-	5 (FH-S)
When connected to a 5 million-pixel Camera (FZ-S)	Connected to 1 camera	Color	16 (FZ-S)	16 (FZ-S)
		Monochrome	16 (FZ-S)	16 (FZ-S)
	Connected to 2 cameras	Color	8 (FZ-S)	8 (FZ-S)
		Monochrome	8 (FZ-S)	8 (FZ-S)
	Connected to 3 cameras	Color	5 (FZ-S)	5 (FZ-S)
		Monochrome	5 (FZ-S)	5 (FZ-S)
	Connected to 4 cameras	Color	4 (FZ-S)	4 (FZ-S)
		Monochrome	4 (FZ-S)	4 (FZ-S)
When connected to a 12 million-pixel Camera (FH-S)	Connected to 1 camera	Color	-	6 (FH-S)
		Monochrome	-	6 (FH-S)
	Connected to 2 cameras	Color	-	3 (FH-S)
		Monochrome	-	3 (FH-S)
	Connected to 3 cameras	Color	-	2 (FH-S)
		Monochrome	-	2 (FH-S)
	Connected to 4 cameras	Color	-	2 (FH-S)
		Monochrome	-	2 (FH-S)

\*1. The image logging capacity changes when multiple cameras of different types are connected at the same time.

[ Ratings ]

Item		Product discontinuation		Recommendable replacement	
		FZ4-1100 FZ4-1105	FZ4-1100-10 FZ4-1105-10	FZ5-1100 FZ5-1105	FZ5-1100-10 FZ5-1105-10
<b>Power supply voltage</b>		20.4 to 26.4 VDC			
<b>Current consumption (at 24.0 VDC) *1</b>	<b>When connected to an intelligent compact camera</b>	5.0 A max.	7.5 A max.	5.0 A max.	7.5 A max.
	<b>When connected to a 300,000-pixel camera</b>	3.7 A max.	4.9 A max.	3.7 A max.	4.9 A max.
	<b>When connected to a 2 million-pixel camera</b>				
	<b>When connected to a 5 million-pixel camera</b>				
<b>Weight</b>		Approx. 3.2 kg	Approx. 3.4 kg	Approx. 3.2 kg	Approx. 3.4 kg
<b>Accessories</b>		Touch pen, Instruction manual, 6 mounting brackets			

Note 1. The current consumption when the maximum number of cameras supported by each controller are connected.

If a strobe controller model is connected to a lamp, the current consumption is as high as when an intelligent camera is connected.

Item		Product discontinuation		Recommendable replacement	
		FZ4-1150 FZ4-1155	FZ4-1150-10 FZ4-1155-10	FH-3050	FH-3050-10
<b>Power supply voltage</b>		DC20.4~26.4V			
<b>Current consumption (at 24.0 VDC) *1</b>	<b>When connected to an intelligent compact camera</b>	5.0 A max.	7.5 A max.	5.0 A (2 Camera)	5.4 A (2 Camera) 7.0 A (4 Camera)
	<b>When connected to a 300,000-pixel camera</b>	3.7 A max.	4.9 A max.	4.1 A (2 Camera)	4.2 A (2 Camera) 4.8 A (4 Camera)
	<b>When connected to a 2 million-pixel camera</b>	3.7 A max.	4.9 A max.		
	<b>When connected to a 4 million-pixel camera</b>	-	-		
	<b>When connected to a 5 million-pixel camera</b>	3.7 A max.	4.9 A max.		
	<b>When connected to a 12 million-pixel camera</b>	-	-		
<b>Weight</b>		Approx. 1.8 kg	Approx. 1.9 kg	Approx. 3.2 kg	Approx. 3.4 kg
<b>Accessories</b>		Instruction Sheet		Instruction Sheet Instruction installation manual Terminal block connector Ferrite core	

Note 1. The current consumption when the maximum number of cameras supported by each controller are connected.

If a strobe controller model is connected to a lamp, the current consumption is as high as when an intelligent camera is connected.

**[ Operation Environment ]**

Item		Product discontinuation Model FZ4-110[] Series	Recommendable replacement Model FZ5-110[] Series
Ambient temperature range	Operating	Ambient temperature specifiable. The cooling fan speed can be switched according to the setting. 0 to 45°C: Low speed 0 to 50°C: High speed	
	Storage	-20 to 65°C (with no icing or condensation)	
Ambient humidity range	Operating	35 to 85%RH (with no condensation)	
	Storage		

Item		Product discontinuation Model FZ4-115[] Series	Recommendable replacement Model FH-3050 Series
Ambient temperature range	Operating	0 to 50°C	
	Storage	-20 to 65°C (with no icing or condensation)	
Ambient humidity range	Operating	35 to 85%RH (with no condensation)	

**[ External interface ]**

Item	Product discontinuation Model FZ4-110[] Series	Recommendable replacement Model FZ5-110[] Series
Serial communications	RS-232C: 1 CH	
EtherNet communications	Ethernet 1000BASE-T/100BASE-TX/10BASE-T	
EtherNet/IP communications	Ethernet port baud rate: 100 Mbps (100BASE-TX)	
Parallel I/O interface	<u>17 inputs</u> RESET, STEP0/ENCTRIG_Z0, STEP1/ENCTRIG_Z1, DSA0~1, ENCTRIG_A0~1, ENCTRIG_B0~1, DI0~7  <u>29 outputs</u> RUN/BUSY1, BUSY0, GATE0~1, OR0~1, READY0~1, ERROR, STGOUT0~1, DO0~15  * STGOUT2 to 3 only for camera 4 ch type	
Monitor interface	Integrated Controller and 12.1 inch TFT color LCD ( Resolution: XGA 1,024 × 768 dots) Analogue RGB video output, 1 channel	
USB interface	4 channels (supports USB 1.1 and 2.0)	

[ External interface ]

Item	Product discontinuation Model FZ4-115□ Series	Recommendable replacement Model FH-3050 Series
<b>Serial communications</b>	RS-232C/422: 1 CH	RS-232C: 1 CH
<b>EtherNet communications</b>	Ethernet 100BASE-TX/10BASE-T	Ethernet 1000BASE-T
<b>EtherNet/IP communications</b>	Use Ethernet port Transmission Speed: 100 Mbps (100BASE-TX)	Use Ethernet port Transmission Speed: 1 Gbps (1000BASE-TX)
<b>EtherCAT communications</b>	-	EtherCAT dedicated protocol (100BASE-TX)
<b>Parallel I/O interface</b>	<p><u>17 inputs</u> RESET, STEP0/ENCTRIG_Z0, STEP1/ENCTRIG_Z1, DSA0~1, ENCTRIG_A0~1, ENCTRIG_B0~1, DI0~7</p> <p><u>29 outputs</u> RUN/BUSY1, BUSY0, GATE0~1, OR0~1, READY0~1, ERROR, STGOUT0~3, DO0~15</p> <p>* STGOUT2 to 3 only for camera 4 ch type</p>	<p>• In the 2-line random trigger mode <u>17 inputs</u> STEP0/ENCTRIG_Z0, STEP1/ENCTRIG_Z1, ENCTRIG_A0~1, ENCTRIG_B0~1, DSA0~1, DI0~7, DI_LINE0</p> <p><u>37 outputs</u> RUN0~1, READY0~1, BUSY0~1, OR0~1, ERROR0~1, GATE0~1, STGOUT0/SHTOUT0, STGOUT1/SHTOUT1, STGOUT2~7, DO0~15, ACK</p> <p>• In the 5-line to 8-line random trigger mode <u>19 inputs</u> STEP0~7, DI_LINE0~2, DI0~7</p> <p><u>34 outputs</u> READY0~7, BUSY0~7, OR0~7, ACK, ERROR, STGOUT/SHTOUT0~7</p>
<b>Encoder interface</b>	-	RS422-A line driver level. Phase A/B: single-phase 4 MHz (multiplying phase difference of 1 MHz by 4 times), Phase Z: 1 MHz
<b>Monitor interface</b>	Analogue RGB video output, 1 channel (Resolution: XGA 1,024 × 768 dots)	DVI-I(Single Link) output IF × 1ch
<b>USB interface</b>	4 channels (supports USB 1.1 and 2.0)	4 channels (supports USB 1.1 and 2.0)
<b>SD card interface</b>	-	SDHC card of Class4 or higher rating is recommended.



[ Processing Items ]

Item		Product discontinuation Model FZ4-11[ ] Series	Recommendable replacement Model FZ5-110[ ] Series Model FH-3050 Series
Inspections / Measurement	Search	YES	YES
	Flexible Search	YES	YES
	Sensitive Search	YES	YES
	ECM Search	YES	YES
	EC Circle Search	YES	YES
	Shape Search+	YES	NO
	Shape Search II	YES	YES
	Shape Search III	NO	YES
	EC Corner	YES	YES
	EC Cross	NO	YES
	Classification	NO	YES
	Edge Position	YES	YES
	Edge Pitch	YES	YES
	Scan Edge Position	YES	YES
	Scan Edge Width	YES	YES
	Circular Scan Edge Position	YES	YES
	Circular Scan Edge Width	YES	YES
	Intersection	NO	YES
	Color Data	YES	YES
	Gravity and Area	YES	YES
	Labeling	YES	YES
	Label Data	YES	YES
	Labeling+	YES	NO
	Defect	YES	YES
	Precise Defect	YES	YES
	Fine Matching	YES	YES
	Character Inspection	YES	YES
	Date Verification	YES	YES
	Model Dictionary	YES	YES
	Barcode+ *1	YES	NO
	Barcode *1	YES	YES
	2D Code *2	YES	YES
2D Code+ *2	YES	NO	
OCR User Dictionary	NO	YES	
OCR	NO	YES	
Circle Angle	YES	YES	
Glue Bead Inspection	NO	YES	
Input image	Camera Image Input	YES	YES
	Camera Image Input FH	NO	YES
	Camera Image Input HDR	YES	YES
	Camera Image Input HDR Lite	YES	YES
	Camera Switching	YES	YES
	Measurement Image Switching	YES	YES

\*1. Bar Codes that can be read:

JAN/EAN/UPC (including add-on codes), Code 39, Codabar (NW-7), IFT (Interleaved 2 of 5), Code 93, Code128, GS1 DataBar (RSS-14/RSS Limited/RSS Expanded), PharmaCode

\*2. 2D Codes that can be read: Data Matrix, QR Code

[ Processing Items ]

Item		Product discontinuation Model FZ4-11[ ] Series	Recommendable replacement Model FZ5-110[ ] Series Model FH-3050 Series
Correcting Images	Position compensation	YES	YES
	Trapezoidal Correction	NO	YES
	Trapezoidal Correction+	YES	NO
	Filtering	YES	YES
	Background Suppression	YES	YES
	Brightness Correct filter	YES	YES
	Color Gray filter	YES	YES
	Extract Color Filter	YES	YES
	Anti Color shading	YES	YES
	Stripes Removal Filter+	YES	NO
	Stripes Removal Filter II	YES	YES
	Halation Cut+	YES	NO
	Panorama+	YES	NO
	Polar Transformation	YES	YES
	Machine Simulator	NO	YES
	Image Subtraction	NO	YES
	Advanced Filter	NO	YES
Panorama	NO	YES	
Assisting inspections / Measurement	Unit Macro	NO	YES
	Unit calculation macro	NO	YES
	Calculation	YES	YES
	Line Regression	YES	YES
	Circle Regression	YES	YES
	Calibration+	YES	NO
	Precise Calibration	YES	YES
	User Data	YES	YES
	Set Unit data	YES	YES
	Get Unit Data	YES	YES
	Set Unit Figure	YES	YES
	Get Unit Figure	YES	YES
	Trend Monitor	YES	YES
	Image Logging	YES	YES
	Image Conversion Logging	YES	YES
	Data Logging	YES	YES
	Elapsed Time	YES	YES
	Wait	YES	YES
	focus	YES	YES
	Iris	YES	YES
	Parallelize	NO	YES
	Parallelize Task	NO	YES
	Statistics	NO	YES
	Reference Calib Data	NO	YES
	Position Data calculation	NO	YES
	Robot Data	NO	YES
	Vision Master Calibration	NO	YES
	PLC Master Calibration	NO	YES
	Convert Position Data	NO	YES
	Movement Single Position	NO	YES
Movement Multi Points	NO	YES	
Detection Point	NO	YES	
Camera calibration	NO	YES	
Data Save	NO	YES	
Stage Data	NO	YES	

[ Processing Items ]

Item		Product discontinuation Model FZ4-11[ ] Series	Recommendable replacement Model FZ5-110[ ] Series Model FH-3050 Series
Branching processing	Conditional Branch	YES	YES
	End	YES	YES
	DI branch	YES	YES
	Control Flow Normal	YES	YES
	Control Flow PLC Link	YES	YES
	Control Flow Parallel	YES	YES
	Control Flow Fieldbus	YES	YES
	Selective Branch	NO	YES
Outputting results	Data Output	YES	YES
	Parallel Data Output	YES	YES
	Parallel Judgement Output	YES	YES
	Fieldbus Data Output	YES	YES
Displaying results on the monitor	Result Display	YES	YES
	Display Image File	YES	YES
	Display Last NG Image	YES	YES

Specifications and prices in this product news are as of the issue date and are subject to change without notice. Only main changes in specifications are described in this document. Please be sure to read the relevant catalogs, datasheets, product specifications, instructions, and manuals for precautions and necessary information when using products.